




ACCESSORIES

OIL SEPARATOR




Through the use of an oil separator oil droplets are caused deposited by condensation. Thereby both the adsorber is protected as preserves the environment from harmful oil aerosols. The function is thanks to the efficient construction, with impeller and wire mesh, guaranteed.

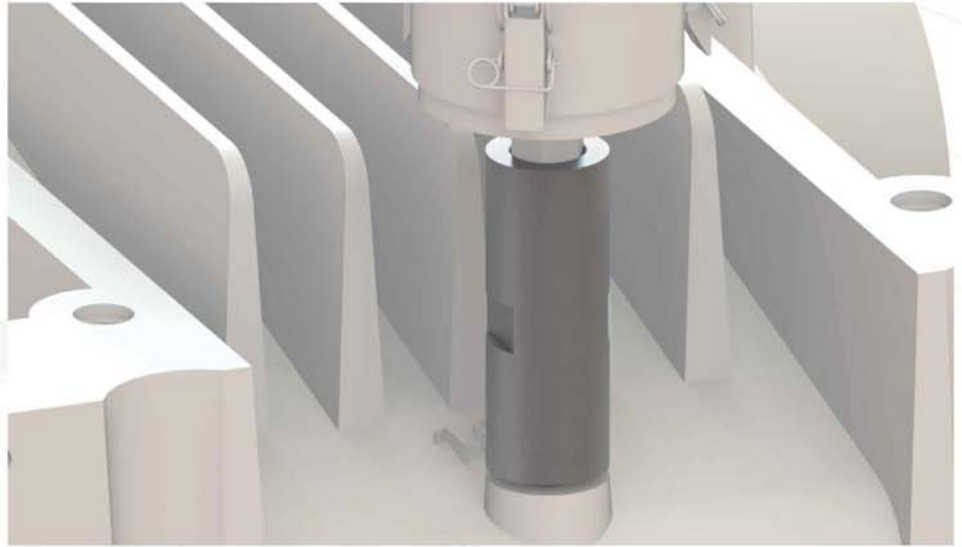

EXHAUST AIR

- Escaping oil particles are swirled
- Condensation of oil particles inside the demister
- Oil particles combine to form oil droplets and drip back

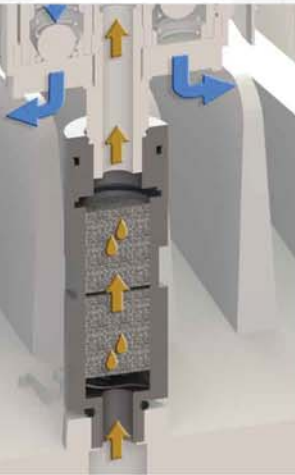

SUPPLY AIR

- Again incoming air purifies the oil separator
- Oil droplets drip back



VERSION	CONNECTION	SEPARATING ELEMENT	SIZE A [mm]	SIZE B [mm]
OS-1	Various thread	1x Wire mesh	105	50
OS-2	Various thread	2x Wire mesh	155	50

